



# Review of road surface photometry methods and devices – Proposal for new measurement geometries

V Muzet PhD<sup>a</sup> , J Bernasconi PhD<sup>b</sup>, P Iacomussi MSc<sup>c</sup> , S Liandrat MSc<sup>d</sup>,  
F Greffier MSc<sup>e</sup>, P Blattner PhD<sup>b</sup>, J Reber BSc<sup>b</sup> and M Lindgren PhD<sup>f</sup> 

<sup>a</sup>Cerema, Research team ENDSUM, Strasbourg, France

<sup>b</sup>Department of Optics, METAS, Federal Institute of Metrology, Berne-Wabern, Switzerland

<sup>c</sup>Department of Applied Metrology and Engineering, INRIM, Istituto Nazionale di Ricerca Metrologica, Torino, Italy

<sup>d</sup>Cerema, Research Team STI, Clermont Ferrand, France

<sup>e</sup>Cerema, Light and Lighting Team, Angers, France

<sup>f</sup>Department of Measurement Science and Technology, RISE, Research Institutes of Sweden AB, Borås, Sweden

Received 8 April 2020; Revised 3 July 2020; Accepted 16 July 2020

Specifications concerning road lighting and photometry of road surfaces were established more than 50 years ago. Road lighting design and road marking visibility were developed for vehicle driving. The observation distance defined by standards corresponds to interurban applications; however, within Europe these areas do not tend to be lit. The objective of the SURFACE project is to propose new geometries for the photometric characterisation of pavements, both adapted to different urban travel modes and new lighting technologies. This article reviews the available guidelines, standards, measuring devices and literature regarding geometries and road lighting applications, and presents the project SURFACE analysis and proposal. The SURFACE consortium recommends adding several new angles for different driving conditions and road users; 2.29° for urban environments and consistency with road marking standard, and 1° for extra-urban environment and consistency with previous geometries. A 5° angle, corresponding to 17-m viewing distance, could be an interesting compromise, suitable for urban driving at low speed, cycling and for scooters. The angles of 10° and 20° are under consideration for describing the boundary between diffuse and specular behaviour.

## 1. Introduction

Specifications concerning road lighting and photometry of road surfaces were established in the 1970s.<sup>1</sup> Road lighting design and road marking visibility were developed primarily

for drivers of motorised vehicles. The observation distances defined by standards correspond to interurban applications; however, these areas are rarely lit in Europe.

Road luminance is defined in the EN 13201-series of European standards<sup>2–5</sup> as the key parameter which road lighting has to fulfil in order to provide lighting intended to ensure the safety of road users after dark.

---

Address for correspondence: V Muzet, Cerema, Research team ENDSUM, 11 rue Jean Mentelin, Strasbourg 67035, France.  
E-mail: valerie.muzet@cerema.fr

## 2 Road surface photometry

Road surface luminances, which allow the perception of possible obstacles and of the environment, are based on a vision model<sup>6</sup> and then realised through artificial road lighting.

The design of a road lighting system includes determination of the optimal combination of lamp power, height, spacing and luminaire optics to provide the desired road surface luminance. A road class is assigned according to road and traffic characteristics, following national requirements based on CEN/TR 13201-1:2014.<sup>7</sup>

Road surface luminance is the light quantity perceived by drivers. It is directly related to the luminous intensity emitted by a luminaire in a given direction and the reflective characteristics of the road surface in the same direction, towards the viewing direction of the observer. The intensity emitted by a luminaire is derived from the spatial luminous intensity distribution of the luminaire, usually measured in accredited laboratories equipped with a goniophotometer and provided by luminaire producers. The amount of light reflected from the road depends on the direction of observation and angles of incidence (or, *geometries*), and is represented by the luminance coefficient ( $q$ ) of the road surface.

The luminance coefficient describes the geometric reflective behaviour of any material and in addition to road lighting design has applications including the creation of photo-realistic images, energy and lighting calculations. Since the lighting design can be done either before or after the road construction, road lighting calculations are usually performed using tabulated values of  $q$  for different road pavements, defined as reference pavements. EN standards also require on-site verification for compliance with national road lighting requirements. In this case, knowledge of the road pavement luminance values used in the design and the actual installed luminaire data are necessary. However, in practice the

photometric characteristics of the pavements are not generally measured.<sup>8–11</sup>

This article presents results and recommendations of the SURFACE project.<sup>12</sup> The objectives of this project are to review existing measuring devices and to propose new geometries for the photometric characterisation of pavements, adapted to both different urban travel modes and new lighting technologies. The first part of this article presents quantities and basics which defines pavement photometry, according to existing guidelines and standards. Following a description of the SURFACE project, the second part of the article is a review of the laboratory and portable measuring devices used for road photometry, highlighting certain instrument characteristics. The third part focuses on available literature regarding geometries and road lighting applications and presents the analyses and recommendations resulting from the SURFACE project.

## 2. Pavement photometry

The method for photometrically characterising pavements was developed in the 1970s<sup>1</sup> and updated in 1982<sup>13</sup> and 2001.<sup>14</sup> The quantities used in road lighting characterisation are described in three reports from the International Commission on Illumination (CIE).<sup>15–17</sup>

The surface of a pavement is classified according to its reflection properties. The most characteristic parameter is the luminance coefficient  $q$ , which is the ratio between the luminance  $L$  in  $\text{cd}/\text{m}^2$ , which the observer sees, and the illuminance  $E$  in lux which is incident on the surface (equation 1).

$$q = \frac{L}{E} \quad (1)$$

Since the 1980s, for practical reasons the luminance coefficient was replaced by the

reduced luminance coefficient  $r$  in  $\text{cd}/\text{m}^2/\text{lux}$ , which is derived from  $q$  (equation 2).


$$r = q \cos^3 \varepsilon \quad (2)$$

A reduced coefficient table called  $r$ -table was defined, where the luminance coefficient  $r$  is given for a combination of fixed lighting angles  $\beta$  and  $\tan \varepsilon$  (see Figure 1). The standardised viewing height is 1.5 m and the angle of observation  $\alpha$  is constant at  $1^\circ$ , corresponding to an observation distance of 86 m. Lighting standards target an area of the road between 60 m and 160 m ahead of the driver, this being considered an important area for the detection of obstacles. It was also defined for interurban driving where the speed is about 80 to 90 km/h.

The average luminance coefficient  $Q_0$  represents the degree of lightness of the measured surface.<sup>14</sup> It is computed as the average of the luminance coefficients over the specified solid angle,  $\Omega_0$  (equation 3).

$$Q_0 = \frac{1}{\Omega_0} \int q d\Omega \quad (3)$$

In practice, due to the finite number of measurements, the integration results in a numerical summation approximated with

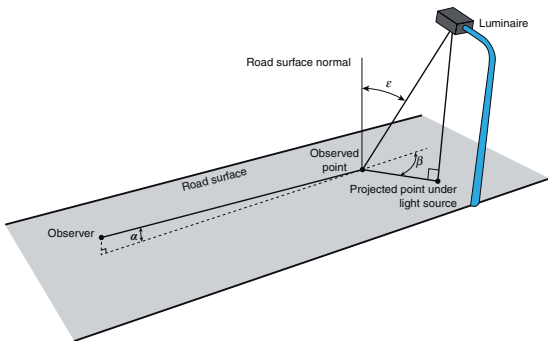

**Figure 1** The photometric characteristics of the road surface depend on the angles of observation  $\alpha$ , deviation  $\beta$  and incidence  $\varepsilon$ . By convention, according to CIE 066 and CIE 144, guidelines and road lighting standards, for the characterisation of road photometry  $\alpha$  is set at  $1^\circ$

weighting factors corresponding to the solid angle attributed to each value  $\Delta\omega$  and given for each combination of  $\tan \varepsilon$  and  $\beta$  angles (equation 4)<sup>15</sup>

$$Q_0 = \frac{\sum q \cdot \Delta\omega}{\sum \Delta\omega} \quad (4)$$

The specular factor  $S_1$  represents the degree of specularity (shininess) of the observed surface. It is defined as the ratio between the reduced luminance coefficients of two specific illumination conditions (equation 5)

$$S_1 = \frac{r(\beta = 0, \tan \varepsilon = 2)}{r(\beta = 0, \tan \varepsilon = 0)} \quad (5)$$

Standard reflection tables are used worldwide, and they are based on measurements carried out in northern Europe in the 1960s and 1970s.<sup>15</sup> However, discrepancies have been found in more recent measurements.<sup>8-11</sup> These discrepancies are attributed to the change in pavement surface technology and aging of the road surfaces.

### 3. The current limitations of road photometry

In EN 13201-3,<sup>3</sup> the geometries (lighting and viewing angles) at which the  $q$  values should be known is given and so is the format of the  $r$ -table (Table 3 of that standard). However, no values are given in the standard. The only published reference data were published in a CIE Technical Report,<sup>15</sup> which is more than 40 years old and which does not include information on measurement uncertainty.

In the past 40 years, pavements have changed, driver visual conditions have changed, and traffic behaviour has changed. As a consequence, current road lighting systems are designed using data of road pavement characteristics which may not be representative of actual road surfaces.<sup>8-11</sup> Road surfaces

and luminaires have evolved over time. Awareness of the importance of measurement uncertainty and its relationship with industrial tolerances has also increased. Some studies show that the currently available CIE data<sup>14</sup> may lead to errors on average luminance often over 30% and sometimes over 50%.<sup>11,18</sup>

The EMPIR (European Metrology Programme for Innovation and Research) research project SURFACE ‘Pavement surface characterisation for smart and efficient road lighting’ aims to overcome the current shortcomings of road surface photometry.<sup>19</sup> The goal of SURFACE is to provide necessary data and research to CIE, CEN and the road lighting community. This is achieved by evaluating the current state of the art of measurement devices and methods and by analysing the needs of road user safety related to visual conditions and pavement reflectance. The objective is to provide CIE and CEN with new reference data for current road surfaces and new reference geometries for luminance factor measurement. The new data and geometries should better correspond with the needs of road users, help with the development of smart and LED lighting and lead to a reduction of the environmental impact (including both energy consumption and light pollution) of road lighting installations.

### 4. Review of measurement methods and devices

A review of existing devices was conducted in order to evaluate the current state of the art of road surface photometry. The devices can be divided into two main subsets:

- laboratory instruments, which are used to make absolute measurements and serve as a reference.

- portable devices, which are used to measure the road surface *in-situ* and provide a relative measurement.

#### 4.1 Laboratory instruments

Laboratory instruments consist of a light source, a sample holder and a detector to measure the luminance. The geometry is usually designed to cover the different illumination angles defined in the *r*-table. Some parts are fixed, and some are mobile, depending on the chosen implementation. As the direction of observation is fixed in relation to the sample, the sample and the detector can be in a fixed configuration or move in conjunction with each other. Most of them are fully automated, which makes it easier to measure all the illumination positions. The detection needs to take into account the  $V(\lambda)$  curve<sup>20</sup> in order to measure the luminance. The illuminance on the surface depends on the illumination angle  $\varepsilon$  and can be measured using a luxmeter. The ratio between the luminance and the illuminance can either be calculated from the direct measurement of the luminance and the illuminance (absolute measurement (abs.)) or by relative measurements (rel.), with the help of a calibrated surface.<sup>21</sup>

Table 1 presents an overview of European laboratory instruments found in the literature that are still used.

Laboratory setups are typically characterised by a large distance between the source and the sample (1 to 5 m), which results in good collimation angles (below 1° for most instruments), limiting the uncertainty on the illumination angle. The detector is often placed at a distance such that the acceptance angle of the detection is small.

They usually allow the measurement of the full *r*-table, at the cost of longer measurement times (from 30 minutes to several hours). For most of them, it is therefore possible to compute  $Q_0$  directly using the weighting factor given in CIE 066:1984,<sup>15</sup> which

corresponds to the numerical integration over the considered solid angle.

These devices are expected to have relatively small measurement uncertainty, typically evaluated to be around 10%.<sup>23,29,30</sup> They are therefore used to make the reference measurements necessary to calibrate the portable devices. However, a uniform approach is currently lacking regarding the calibration methodology, the measurement procedure, the traceability, and the measurement uncertainty of these instruments. These shortcomings will be addressed by the SURFACE project in subsequent work.

The main disadvantage of laboratory instruments is that they require samples to be extracted from the road, which is destructive and costly. For this reason, laboratory systems are not suitable to follow the evolution of road surface reflectance over time, and do not allow multiple measurements in the exact same spot throughout several years.

They are also poorly suited for studying different parts of the road. This is important, as the different lanes will exhibit different aging. A single lane can also present strong variations, as the parts exposed to the wheels and the part in between do not follow the same evolution.

#### 4.2 Portable devices

Portable devices are setups that can be transported and used for *in-situ* measurements. Usually, they fit in a car and one or two persons are needed to carry and install them. This results in strict requirements in terms of size and weight, which limits the solutions. An overview of European portable devices found in the literature is presented in Table 2.

These devices always involve some compromises on the measurements, either with restricted measurement geometry combinations, or with larger measurement

**Table 1** An overview of European Laboratory instruments found in the literature

Characteristic	Laboratory or group								
	METAS (LaFOR)	Cerema	Univ. Gustave-Eiffel	INRIM	Univ. of Padova	Aalto Univ.	Technische Univ. Dresden	RISE	Lappeenranta Univ. of Tech.
Location	CH	FR <sub>22</sub>	FR <sub>21,23</sub>	IT <sub>24</sub>	IT <sub>24,25</sub>	FI <sub>26</sub>	GE	SE	FI <sub>27</sub>
Reference									
Automation	Partial	Full	Full	Full	Full	Full	INA	Partial	None
<i>L/E</i> meas.	Absolute	Absolute	Relative	Relative	Relative	Relative	INA	Absolute	Absolute
Procedure									
Source angular subtense <sup>28</sup>	0.5°	10°	INA	0.1°	0.1°	<3°	INA	1.4°	0.4°
Detector angular subtense <sup>28</sup>	1.1°	0.3°	0.3°	0.1°	0.1°	<0.2°	INA	0.25°–1.0°	1°
Observation angle $\alpha$	0.6°–1.4°	1° 2.29° 5° 10° 20° 45°	1°–90°	0°–90°	0°–90°	1°	1° 3°	1.0°–80°	1°
<i>r</i> -table	Yes	Yes	Yes	Yes	Yes	Yes	Yes	IP	XP
$Q_0$	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
$S_1$	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	XP
Meas. field size (mm <sup>2</sup> )	$\geq 10^4$	$\geq 10^4$	7540	7850	$> 10^4$	1960	INA	$< 10^4$	3850

INA: Information not available; IP: interpolation; XP: extrapolation.

**Table 2** An overview of European portable devices found in the literature

Characteristic	Laboratory or group									
	METAS (MoFOR)	METAS (LTL-200)	Cerema (COLUROUTE)	Cerema (COLUROUTE 2)	Univ. of Padova	Minel Schreuder (Memphis)	Rtech Schreuder (Memphis)	NMF (NMF box)		
Location Reference	CH <sup>35</sup>	CH	FR <sup>31,36</sup>	FR	IT <sup>33</sup>	RS <sup>37</sup>	BE <sup>32</sup>	DK <sup>34</sup>		
Illumination	Complete source scan	Restricted 8 sources	Restricted 27 sources	Restricted 27 sources	Restricted 6 sources with $\beta$ rotation	Restricted 4 sources	Restricted 4 sources	Restricted 2 sources		
Source angular subtense <sup>28</sup>	9.5°	1.1°	5.2°	3.2°	INA	INA	INA	20° 4°		
Detector angular subtense <sup>28</sup>	0.7°	1.1°	8.6° × 0.9°	INA	INA	INA	INA	1.2°		
Observation angle $\alpha$	1°	1°	1°	1° 2.29° 3° 5° 10°	1°	5°, 10°, 20°, 30°, 40°, 50°, 60°, 70°, 80° for $\beta=0^\circ, 10^\circ, 20^\circ, 30^\circ, 150^\circ$		1° 1.5° 2.29°		
r-table	Yes	No	IP & XP	IP & XP	IP & XP	IP & XP	Search of the closest r-table in a database	No		
$Q_0$	Yes	Linear	Yes	Yes	Yes	Yes	7850	Linear combination		
$S_1$	Yes	Yes	Yes	Yes	Yes	IP	7850	Yes		
Meas. field size (mm <sup>2</sup> )	7850	5600	2000	2000	~8000	7850	7850	8000		
Specific characteristics	No	No	No	No	No	Inverse light path	Inverse light path	Meas. $Q_d$		

INA: Information not available; IP: interpolation; XP: extrapolation.



uncertainties. The solutions adopted are very varied in their mechanical and optical solutions. Some devices measure using pre-determined illumination angle configurations.<sup>31–34</sup> Other devices measure the full  $r$ -table but face other issues, like the restricted size, which makes it more difficult to obtain a highly collimated source (MoFOR). The size of the illumination field is often limited to a smaller area than the recommended  $10^4 \text{ mm}^2$ . In that case, the solution proposed is to measure different spots on the surface until the sum of all the measured area is  $10^4 \text{ mm}^2$  or higher.

Using restricted geometry combinations, the setup does not measure the full  $r$ -table. Only selected illumination angles ( $\varepsilon$ ,  $\beta$ ) are measured. These devices usually allow the measurement of the specular components directly, but not  $Q_0$ . Some modelling, interpolation, and extrapolation are then used to retrieve the complete  $r$ -table and to compute  $Q_0$ .<sup>31</sup> Sometimes, the measured data or the resulting modelled  $r$ -tables are used to find the closest measured  $r$ -table from a database based on measurements done with a laboratory instrument.<sup>32</sup> This approach avoids the discrepancies found between standard CIE  $r$ -tables, which were done on old pavement surfaces, and measurements done on roads with more recent pavement. However, it assumes that the characteristics of particular pavements are present in the database used. For another device,  $Q_0$  is estimated by a linear combination of two  $r$ -values,  $r(0, 0)$  and  $r(0, 2)$ , which are the ones used for the specular factor.<sup>34</sup> The coefficients of the linear combination are found by applying a linear regression on a database of  $r$ -tables measured with a laboratory instrument. However, due to the small number of measurement points, this method gives results that have a high standard deviation. The same method is applied to the measurements made with the portable device LTL-200 to find  $Q_0$  and  $S_1$ , but using eight lamps.

Another portable measurement device developed in China measures  $Q_0$  directly *in situ*.<sup>38</sup> It uses a structured illumination, which reproduces the solid angle covered by the numerical integration. This is done by using a sphere with diffuse reflective properties and by painting black the areas which do not contribute to the overall integral, thus determining the integration boundaries.

The devices are also used in various ambient lighting conditions. They therefore utilise different solutions to avoid stray light. Solutions adopted range from blocking light from the environment with a box and measuring the dark signal, to using a modulated signal and synchronous detection.<sup>31</sup>

The main advantage of portable devices is that they allow non-destructive measurements. This means that the evolution of pavements can be studied over a long period of time<sup>14,36</sup> and that this information can be used to make lighting more efficient, by planning a well-suited lighting solution and by using dynamic adaptive lighting.<sup>39</sup> Portable devices can evaluate the heterogeneity of the photometric characteristics of the road surface and, for example, make many measurements on the wheel and central parts of a lane. So, despite being generally less precise, they are more representative of the actual road photometry.

## 5. Use of new geometries for the definition of road lighting design

### 5.1 Literature review regarding geometry

The geometry currently used with an observation angle of  $1^\circ$  for the design of pavement lighting was defined in the 1970s and confirmed in 1982,<sup>13</sup> 2001,<sup>14</sup> and 2019.<sup>17</sup> In these CIE documents and in the road lighting standard EN 13201-3,<sup>3</sup> the height of the eye of the observer is set at the nominal value of 1.5 m. In the same standard, the range of observation angle is conventionally

assumed to be  $1.0 \pm 0.5^\circ$  according to a viewing distance between 60 and 160 m.


Concerning the characterisation of road markings, other geometries are defined in the standard EN 1436.<sup>40</sup> The eye of the observer is set at the nominal value of 1.2 m and the angle of observation is  $2.29^\circ$ , which corresponds to a distance of observation of 30 m. In the road marking standard, the tolerance on the observation angle is  $\pm 0.05^\circ$ . The coefficient of retroreflected luminance  $R_L$  corresponds to the night visibility of the marking, with an illumination angle of  $1.24^\circ$  (Figure 2(a)).

The luminance coefficient under diffuse illumination  $Q_d$  (equation 6) was developed for road markings but could be also relevant for road surfaces.<sup>14,40</sup>  $Q_d$  is defined as the

quotient of reflected luminance at  $2.29^\circ$  under diffuse illumination (Figure 2b). It is the average of the luminance coefficient weighted by  $\cos \varepsilon$  integrated over the complete hemisphere above the road surface.


$$Q_d = \frac{\int q \cos \varepsilon d\Omega}{\int \cos \varepsilon d\Omega} \quad (6)$$

In the 1990s, Sorensen<sup>41</sup> suggested using  $Q_d$  instead of  $Q_0$  for road lighting specification. At that time, both were measured at a nominal observation angle of  $1^\circ$ . A method to compute  $Q_d$  from an  $r$ -table was given.<sup>41</sup> A device able to measure  $Q_d$  and  $Q_0$  was developed<sup>41</sup> having an observation angle of  $1.37^\circ$ . The calculation of the average

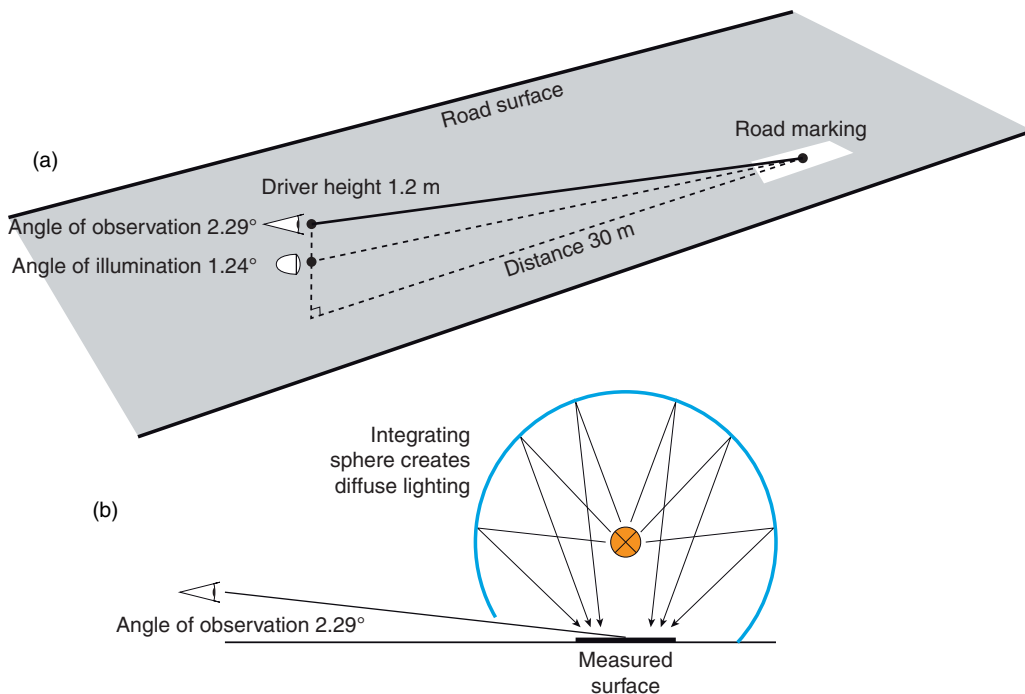

**Figure 2** Schematic representations of the conventional geometry for the photometric characterisation of road markings according to EN 1436, which defines a nominal observation angle of  $2.29^\circ$  corresponding to an observation distance of 30 m and a driver's height of 1.2 m. (a) Geometry for the measurement of the retroreflection factor  $R_L$ : the illumination angle is set to  $1.24^\circ$ . (b) Geometry of the measurement of the luminance coefficient under diffuse illumination  $Q_d$ . The integrating sphere creates a diffuse illumination from the light source placed in the middle of the sphere



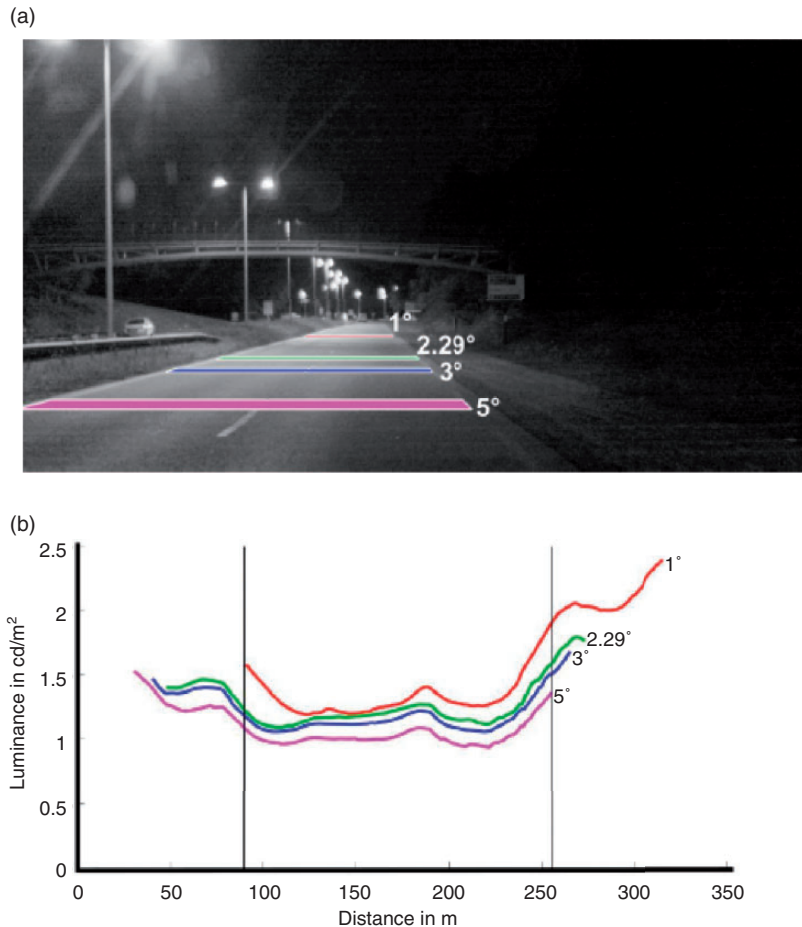

**Figure 3.** (a) Example of a luminance image taken with a luminance camera. The areas corresponding to different angles of observation are shown.<sup>51</sup> (b) Corresponding luminance measured with the concept of a moving observer<sup>49,51</sup>

luminance and illuminance ratio in a typical lighting installation with two different lamp settings for the standard  $r$ -tables defined in CIE 066<sup>15</sup> was compared<sup>29</sup> to the values of  $Q_d$  and  $Q_0$ . For the two road lighting installations used,  $Q_d$  gave the best estimate of the average luminance with discrepancies between 0% and  $\pm 8\%$  for  $Q_d$  and an underestimation with  $Q_0$  from  $-12\%$  to  $-39\%$ . Brusque and Carta<sup>42</sup> made the same comparison with 12 lighting installations and the measured  $r$ -tables of 164 different pavements

from R1 to R4: The mean discrepancy was between  $-2\%$  and  $-13\%$  for  $Q_0$  and between  $-13\%$  and  $-41\%$  for  $Q_d$ . The results obtained were always better when using  $Q_0$  and showed that the  $Q_d$  factor underestimates the specular effect and that differences are larger for grazing angles.

After these studies, the CIE publication 144<sup>14</sup> confirmed the observation angle of  $1^\circ$  and the use of  $Q_0$  for pavement characterisation and an observation angle of  $2.29^\circ$  for road markings.

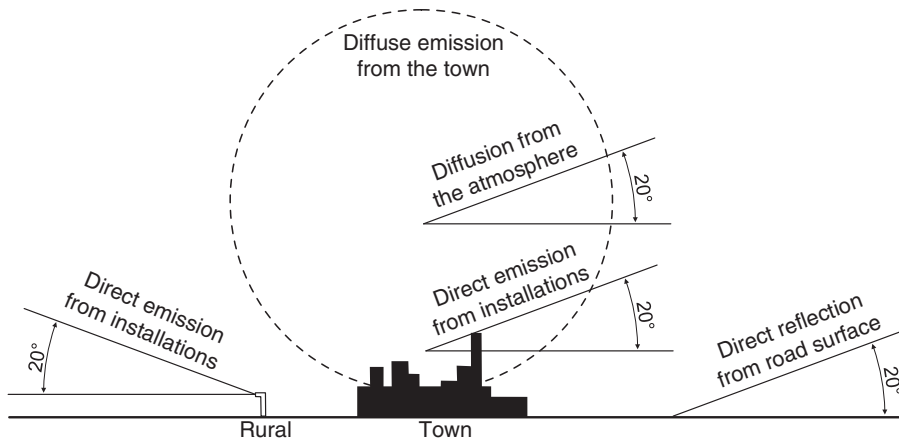


Figure 4. Theoretical model for light pollution evaluation of the light emission of town<sup>56</sup>

Gibbons<sup>43</sup> used a four-angle gonioreflectometer to study the influence of different observation angles on 20 core pavements with  $\alpha = 1^\circ, 2^\circ, 3^\circ, 5^\circ, 7^\circ, 10^\circ, 12^\circ, 15^\circ, 20^\circ, 30^\circ, 45^\circ$  and  $90^\circ$ . It was shown that the lightness of the pavement changes with the observation angle and that, except for the smaller observation angles, the specularity decreases with the observation angle.

In more recent literature, a suggestion of different observation angles was made by Chain and Marchaut.<sup>44</sup> These were  $90^\circ$  for the characterisation of light from airplanes,  $3^\circ$  for urban applications,  $10^\circ$  for cyclists and pedestrians and  $45^\circ$  for visually impaired people. Some oculometric studies<sup>45,46</sup> show differences in visual strategy of cyclists as a function of age, but none of them propose a preponderant angle of observation. Patla and Vickers<sup>47</sup> have shown that when a walker is required to step on specific locations in the travel path during locomotion, he looks on average two steps ahead. This result was confirmed by Fotios and Uttley<sup>48</sup> who found using eye tracking that obstacles are detected approximately 3.4 m ahead, thus corresponding to an observation angle of  $27^\circ$  if the eye is at a height of 1.5 m.

Stockmar<sup>49</sup> also suggested an angle of  $3^\circ$ , more adapted to urban applications. In his

study, he indicates that the use of an observation angle of  $3^\circ$  instead of  $1^\circ$  induces a 10% reduction of  $Q_0$ . Sorensen et al.<sup>50</sup> has developed a device able to measure at  $1^\circ, 1.5^\circ$ , and  $2.29^\circ$ . The first results on a class R2 pavement show that the impact on  $Q_0$  and  $S_1$  is weak, especially for  $Q_0$  (and  $Q_d$ ). The specular factor  $S_1$  drops with increasing angle.

In the Greffier case study,<sup>51</sup> the impact of using observation angles of  $2.29^\circ, 3^\circ$ , and  $5^\circ$  was studied with a mobile luminance camera. The luminance and uniformities were calculated according to the EN 13201 mesh grid, using the concept of a mobile observer proposed by Stockmar.<sup>49</sup> The first results show that the luminance decreases with an increase of the observation angle.

For visually impaired people, the observation angle is set at  $45^\circ$  in the standard concerning pedotactile caution warning devices.<sup>52</sup> The eye of the observer is also set by convention at 1.5 m.

Concerning the impact of light pollution on astronomical observation, no specific angle is given in the CIE document.<sup>14</sup> However, according to the experience of astronomers,<sup>53–55</sup> the artificial sky luminance is mainly generated by the luminous flux, emitted directly by the luminaires and reflected by

the illuminated surfaces, within the range of elevation between 0° and 20° over the horizontal plane. At such elevations, the light travels in the low levels of the atmosphere, where the aerosols generate downward diffusion into the entrance pupil of a telescope and a sort of veiling luminance in the star observation direction. This reduces the contrast of the heavenly bodies since it adds to the natural sky luminance. Upward light with elevations higher than 20° travels in higher layers of the atmosphere, where aerosols are not present, and generates a much lower downward diffusion.

A town can be treated as a single uniformly diffusing source;<sup>56</sup> most luminaires are hidden in cavities between buildings and few luminaires are not screened by buildings (typically on the boundary of the town or in large open areas). The road surface behaviour for light pollution is similar: light reflected by road at angles between 0° and 20° over the horizontal road plane have higher impact on astronomical observations too. Unfortunately, these angles are very close to the lighting angles (up to 70° to 75° from the vertical) that provide lighting efficiency. Furthermore, to reach these grazing angles using discharge lamp sources entails some upward direct light (about 2–3%) from the luminaires. Only

certain LED luminaires satisfy standard specifications on zero upward flux. But one shall keep in mind that light pollution and energy consumption are related to the illuminance on the road,<sup>11,57</sup> while visibility and safety are directly linked to the luminance measured along the observation direction.

In calculations of obtrusive light and in particular for the calculation of the upward flux ratio,<sup>58</sup> the reflectance of the road is the ratio between the incident illuminance and the reflected illuminance measured at 1 meter height.<sup>59</sup> It should be mentioned that examples of different surface reflectance are based on measurements done in the 1990s and have not been updated since then.

### 5.2 SURFACE project analysis

Concerning the illumination angles, there is a need for more data at grazing angles due to the use of guide lighting devices mounted at

**Table 5** SURFACE recommendation for new geometries

Road environment condition	Nominal observation angle recommendation
Extra-urban road	1°, viewing distance of 85.9 m
Urban road	2.29°, viewing distance of 37.5 m

**Table 3** Stopping distance at different driving speeds (according to the authors' country driving code)

	Speed (km/h)	Stopping distance on dry pavement in official documents (m)			
		France <sup>60</sup>	Italy <sup>61</sup>	Sweden <sup>62</sup>	Switzerland <sup>63</sup>
Urban driving	30	13	22	16	16–22
	50	28	55	38	34–48
Interurban driving	90	70	136	121	88–115
	120	112	235	222	144–189

**Table 4** Distances which correspond to different nominal observation angles at 1.5-m height of observer

Observation angle $\alpha$ (°)	1	2.29	3	5	7	10	20	45
Corresponding viewing distance (m)	85.9	37.5	28.6	17.1	12.2	8.5	4.1	1.5

low heights, especially in tunnels. Since the  $r$ -table is only defined up to  $\tan \varepsilon = 12$ , when the mounting height of the luminaires is very low ( $H < 2\text{m}$ ), an extension for  $\tan \varepsilon$  is needed. For this reason, in EN 13201-3<sup>3</sup> the informative annex B defines an extended  $r$ -table format for luminaires with low mounting height. The  $r$ -table is extended in  $\tan \varepsilon$  up to 20, by increment of 0.5 for every  $\beta$  angle. However, there is still a need for such data and a new calculation of  $Q_0$  should be proposed to take this table into account. However, up to know, it seems that nobody is able to make measurements at such grazing angles. The main reason is the required very small angular subtense of both the detector and the source.

Concerning the observation angle, it is affected by both the vehicle type and the distance of observation. For drivers of motorised vehicles, in the EN 13201 standards, the main lighting criteria for interurban driving are based on the road surface luminance and include the average luminance, the overall uniformity and the longitudinal uniformity. The driver's eye is assumed to be at the nominal value of 1.5 m above the road surface and the angle of observation is fixed to  $1^\circ$  below the horizontal, corresponding to a distance of 86 m ahead of the observer. This geometry is well adapted for a speed of 90 km/h, on motorways for example. However, nowadays, except in tunnels, there are few interurban lighted roads in Europe. Illuminated areas are located in urban environments where there are several types of road users (vehicle drivers, but also cyclists and pedestrians), travelling at different speeds. To define new observation angles, a first approach is to consider the stopping distance, which is a summation of the reaction distance and braking distance. Typical stopping distances in Europe are presented in Table 3. For road safety, good visibility of obstacles within the stopping distance is very important.

Concerning the height of the observer, the SURFACE proposal is to keep the height of

the observer at the nominal value of 1.5 m, in order to be consistent with EN 13201 and the CIE recommendation. This height is adequate for drivers, cyclists, and pedestrians. In Table 4, the corresponding distance is computed for different observation angles. There is no impact for existing road surface and marking measuring devices because they consider a measuring angle, not a height, expressed as a nominal value.<sup>64</sup>

Based on standards and our bibliography, the SURFACE consortium recommends in Table 5 different nominal observation angles for different driving conditions and road users: for urban environment  $2.29^\circ$  (consistent with road marking standards and stopping distances in urban environment), for extra-urban environment  $1^\circ$  (consistent with previous geometries). The angle of  $5^\circ$ , corresponding to a viewing distance of 17 m, is an interesting complement, suitable for urban driving at low speed, cycling and for scooters. The angles of  $10^\circ$  and  $20^\circ$  are under consideration for describing the boundary between diffuse and specular behaviour.

To improve astronomic observations, a reduction of the prescribed values of road illuminance, and for zones close to observatories also of the luminance value, is required. But the safety of road users must be ensured by alternative means and strategies, like higher lighting levels at intersections and on pedestrian crossings, very low mounting-height luminaires and new visibility models.

As shown in Tables 1 and 2, some measurement devices are already able to measure at the new angles of observation and some are under development among the SURFACE consortium. Using lower grazing angles has several advantages because the design tolerance on the angles is less critical, and thus it is possible to construct more compact instruments. Moreover, existing devices used for the characterisation of road marking could also be transformed to measure road surface photometry. This is why these new geometries

allow the development of less expensive measurement devices and an increased accuracy also for on-site verification.

## 6. Conclusion

The SURFACE project has, during its duration, produced an extensive international review on road photometry, including measurement devices, available data, measurement methods, and national reference values for lighting design.<sup>11</sup> In addition, SURFACE investigated current geometries for road surface characterisation and road user conditions of viewing, and is able to suggest to international normative bodies (CEN and CIE) these findings and new approaches.

Regarding geometries, the first evidence is about the most critical point of the current approach; the reference observation angle currently used in standard. The difficulties of making measurements at  $1^\circ$  observation angle are already recognised in literature,<sup>14,44</sup> but SURFACE has highlighted and substantiated these issues and also proposed solutions. The large literature review and investigation among the SURFACE consortium and stakeholders allow us to suggest referencing normative bodies (CIE and CEN) the use of different geometries according to actual road environment. We recommend keeping the angle of  $1^\circ$  for extra-urban environment and propose new observation angles for different driving conditions and road users. SURFACE suggests additional nominal observation angles of  $2.29^\circ$  for urban environment and consistency with the road marking standard and CIE 144,  $5^\circ$  for urban driving at low speed, cycling and scooters, and also  $10^\circ$  or  $20^\circ$  for light pollution impact evaluation for which investigations are ongoing. These several possible observation angles are proposed to be included at the earliest review stages of CIE 144 and EN 13201 documents.

The impact of the above new geometries for road surface characterisation needs to be

verified by lighting design programs, simulation tools and subjective experiments. The same geometries have to be used at design stage and at on-site verification of compliance.

Some measurement devices for road luminance coefficient evaluation can be easily adapted to the new angles of observation and others are going to be introduced in the market (also among the SURFACE consortium). Furthermore, these new geometries allow the development of less expensive measurement devices and an increased accuracy also for on-site verification. The geometrical constraints of  $1^\circ$  of observation entail difficulties in setup and increased alignment discrepancies. It also affects on-site verification, the identification of measurement grid points, and associated luminance values.

The findings of SURFACE also impact the energy consumption; SURFACE confirmed the advantages of using bright pavements and smart lighting.<sup>11</sup>

Additional impact is expected on the luminance levels required for the different road lighting classes; the current reference values are based on results of visual experiments carried out in the past century on contrast threshold at  $1^\circ$  observation angle and using old pavements.

The definition of new angles of observation will have an impact on the required threshold luminance levels of uniformity. New subjective experiments are needed in order to define new reference values of contrast threshold to acknowledge not only the new recommended geometries, but also current pavements, including bright ones, LED sources, 3D objects detection (instead of 2D shapes as used in the past), and the concept of a moving observer. All these new additional aspects need to be tested: a full approach to road-lit environment, including observer (human or machine) is necessary to maximise the effects and to reach the target of EU Vision Zero – to reduce road deaths to almost zero by 2050. The effect of all these aspects need to be



tested: the research is just at an early stage with the SURFACE project.


### Declaration of conflicting interests

The authors declared no potential conflicts of interest with respect to the research, authorship, and/or publication of this article.


### Funding

The authors disclosed receipt of the following financial support for the research, authorship, and/or publication of this article: This work received funding from the EMPIR programme, project ‘16NRM02 Surface Pavement surface characterisation for smart and efficient road lighting’.<sup>12</sup> The EMPIR (European Metrology Programme for Innovation and Research) programme is co-financed by the Participating States and from the European Union’s Horizon 2020 research and innovation programme EURAMET (EUROPEAN ASSOCIATION OF NATIONAL METROLOGY INSTITUTES). SURFACE is a consortium of six National Metrological Institutes, of Italy, Estonia, France, Finland, Sweden, and Switzerland, plus a National French Research Centre (Cerema) and two industrial companies (Proceq, measuring instruments and Ansys-Optis, software simulation). It has the support of CEN, CIE and National Standardisation Organisations, road authorities, as well as a group of more than 40 stakeholders.

### ORCID iDs

V Muzet  <https://orcid.org/0000-0002-0026-6592>

P Lacomussi  <https://orcid.org/0000-0001-7781-1133>

M Lindgren  <https://orcid.org/0000-0002-2387-1824>

### References

- 1 Commission Internationale de l’Éclairage. *Calculation and Measurement of Luminance and Illuminance in Road Lighting*. CIE 030:1976. Vienna: CIE, 1976.
- 2 European Committee for Standardization. *Road Lighting – Part 2: Performance Requirements*. EN 13201-2:2015. Brussels: CEN, 2015.
- 3 European Committee for Standardization. *Road Lighting – Part 3: Calculation of Performance*. EN 13201-3:2015. Brussels: CEN, 2015.
- 4 European Committee for Standardization. *Road lighting – Part 4: Methods of Measuring Lighting Performance*. EN 13201-4:2015. Brussels: CEN, 2015.
- 5 European Committee for Standardization. *Road lighting – Part 5: Energy Performance Indicators*. EN 13201-5:2015. Brussels: CEN, 2015.
- 6 Brémond R. *Visibility of targets: beyond Blackwell: Proceedings of CIE Workshop on a New Vision of Visibility for Roadway Lighting*, Berlin, Germany, May: 2018.
- 7 European Committee for Standardization. *Road Lighting – Part 1: Guidelines on Selection of Lighting Classes*. CEN/TR 13201-1:2014. Brussels: CEN, 2014.
- 8 Fotios S, Boyce P, Ellis C. The effect of pavement material on road lighting performance. *Lighting Journal* 2006; 71: 35.
- 9 Dumont E, Paumier J-L. *Are standard tables r still representative of the properties of road surfaces in France?: Proceedings of the CIE 26th Session*, Beijing, China, June 4 to 11: 2007.
- 10 Muzet V, Greffier F, Nicolaï A, Taron A, VERNY P. Evaluation of the performance of an optimized road surface/lighting combination. *Lighting Research and Technology* 2018; 51: 576–591.
- 11 Gidlund H, Lindgren M, Muzet V, Rossi G, Iacomussi P. Road surface photometric characterisation and its impact on energy savings. *Coatings* 2019; 9: 286.
- 12 NRM02 SURFACE. *SURFACE*, Retrieved 19 March 2020, from <https://surface-nrm02.eu/>.



- 13 Commission Internationale de l'Éclairage. *Calculation and Measurement of Luminance and Illuminance in Road Lighting*, CIE 030.2:1982. Vienna: CIE, 1982.
- 14 Commission Internationale de l'Éclairage. *Road surface and road marking reflection characteristics*. CIE 144:2001. Vienna: CIE, 2001.
- 15 Commission Internationale de l'Éclairage. *Road surfaces and lighting (joint technical report CIE/PIARC)*. CIE 066:1984. Vienna: CIE, 1984.
- 16 Commission Internationale de l'Éclairage. *Road Lighting Calculations*. CIE 140:2000. Vienna: CIE, 2000.
- 17 Commission Internationale de l'Éclairage. *Road Lighting Calculations*, 2nd Edition. CIE 140:2019. Vienna: CIE, 2019.
- 18 Chain C, Lopez F, Verny P. *Impact of real road photometry on public lighting design: Proceedings of the CIE 26th Session*, Beijing, China, June 4–11: 2007.
- 19 Iacomussi P, Rossi G, Blattner P, Chain C, Muzet V, Dubard J, Van Trang C, Jouanin A, Kubarsepp T, Lindgren M, Manoocheri F, Zehntner P. *Metrology of Road Surface for Smart Lighting: Proceedings of LUX Europa 2017*, Ljubljana, Slovenia, September 18–20: 2017: 103–107.
- 20 *Spectral luminous efficiency (of a monochromatic radiation of wavelength  $\lambda$ ) [ $V(\lambda)$  for photopic vision;  $V'(\lambda)$  for scotopic vision]*. CIE e-International Lighting Vocabulary, Retrieved 18 March 2020, from <http://eilv.cie.co.at/term/1222>.
- 21 Saint-Jacques E, Dumont E, Villa C. *Characterisation of the reflection properties of road surfaces using an in-lab gonio-reflectometer: Proceedings of CIE 2017 Midterm Meetings*, Jeju, Korea, October 23–25: 2017.
- 22 Muzet V, Colomb M, Toinette M, Gandon-Leger P, Christory JP. *Towards an optimization of urban lighting through a combined approach of lighting and road building activities: Proceedings of the 29th Quadrennial Session of the CIE*, Washington, DC, USA, June 14–22: 2019: 789–800.
- 23 Saint-Jacques E, Prevost C, Villa C. *Evaluation of the performance of a road surface gonio-reflectometer: Proceedings of the 29th Quadrennial Session of the CIE*. Washington DC, USA, June 14–22: 2019: 536–545.
- 24 Fiorentin P, Iacomussi P, Rossi G. *A facility for the analysis of reflection properties of surfaces: Proceedings of the 21st IEEE Instrumentation and Measurement Technology Conference (IEEE Cat. No.04CH37510)*, Como, Italy, May 18–20: 2004: 569–574.
- 25 Fiorentin P, Scroccaro A. Analysis of the performance of a goniometer for studying surface reflection. *IEEE Transactions on Instrumentation and Measurement* 2008; 57: 2522–2527.
- 26 Ylinen A-M. *Development and analysis of road lighting: road surfaces and mesopic dimensioning*. PhD thesis. Finland: Aalto University–Helsinki, 2011.
- 27 Basov A. Development of a goniophotometer for measuring reflective properties of road surfaces. Master thesis. Finland: Lappeenranta University of Technology–Lappeenranta, 2017.
- 28 *Angular subtense. CIE e-International lighting vocabulary*. Retrieved 18 March 2020, from <http://eilv.cie.co.at/term/42>.
- 29 Sørensen K. Q0 and Qd – “lightness” of road surfaces in road lighting. *Light and Optics* November 1992.
- 30 Fan S, Liu M, Shen H. Uncertainty analysis of a pavement reflectance measurement system based on a gonio-photometer. *Chinese Optics Letters* 2014; 12: 051201–051204.
- 31 Muzet V, Paumier J-L, Guillard Y. *COLUROUTE: a mobile gonio-reflectometer to characterize the road surface photometry: Proceedings of the 2nd CIE Expert Symposium on “Advances in Photometry and Colorimetry”*, Turin, Italy, July 7–8: 2008.
- 32 Maghe L. *Characterization of Road Surfaces using a Mobile Gonio-reflectometer: Proceedings of the 2nd CIE Expert Symposium on “Advances in Photometry and Colorimetry”*, Turin, Italy, July 7–8: 2008.
- 33 Casol M, Fiorentin P, Scroccaro A. *On road measurements of the luminance coefficient of paving: Proceedings of 16th IMEKO TC4 Symposium Exploring New Frontiers of Instrumentation and Methods for Electrical and Electronic Measurements*, Florence, Italy, September 22–24: 2008.

- 34 Corell D, Sørensen K. *An instrument for the measurement of road surface reflection properties: Proceedings of CIE 2017 Midterm Meetings*, Jeju, Korea, October 23–25: 2017: 443–452.
- 35 Blattner P, Dudli H. *Mobiles Fahrbohnoberflächenreflektometer: Conference proceedings Licht*, September 11: 2006, Bern, Switzerland: 2006: 106.
- 36 Muzet V, Abdo J. On site photometric characterisation of cement concrete pavements with COLUROUTE Device. *Light and Engineering* 2018; 26: 88–94.
- 37 Strbac-Hadzibegovic N, Strbac-Savic S, Kostic M. A new procedure for determining the road surface reduced luminance coefficient table by on-site measurements. *Lighting Research and Technology* 2018; 51: 65–81.
- 38 Chen X, Zheng X, Wu C. Portable instrument to measure the average luminance coefficient of a road surface. *Measurement Science and Technology* 2014; 25: 035203.
- 39 Muzet V, Greffier F, Verny P. *Optimization of road surface reflections properties and lighting: learning of a three-year experiment: Proceedings of the 29th Quadrennial Session of the CIE*. Washington DC, June 14–22: 2019: 525–535.
- 40 European Committee for Standardization. *Road marking materials – Road marking performance for road users and test methods*. EN 1436:2018. Brussels: CEN, 2018.
- 41 Sørensen K, Obro P, Rasmussen B. A review of the suitability of the average luminance coefficient  $Q_0$  for road surfaces and road markings – and proposal for a different parameter. *Lys og Optik, Notat No. 8*. The Danish Illuminating Engineering Laboratory, Lyngby, Denmark, 1992.
- 42 Brusque C, Carta C. *Etude comparative des paramètres  $Q_0$  et  $Q_d$  décrivant la clarté des revêtements routiers: typologie et modélisation des caractéristiques photométriques des matériaux*. LCPC report (subject no. 261116).
- 43 Gibbons RB. *Influence of Pavement Reflection on Target Visibility*. PhD thesis, University of Waterloo, Canada, 1997.
- 44 Chain C, Marchaut V. *R-tables for other observation angles: specific needs for two applications in the field of public lighting: Proceedings of the 2nd CIE Expert Symposium on “Advances in Photometry and Colorimetry”*, Turin, Italy, July 7–8: 2008.
- 45 Fotios S, Uttley J, Cheal C, Hara N. Using eye-tracking to identify pedestrians’ critical visual tasks, Part 1. Dual task approach. *Lighting Research and Technology* 2014; 47: 133–148.
- 46 Fotios S, Castleton HF. Lighting for cycling in the UK—a review. *Lighting Research and Technology* 2015; 49: 381–395.
- 47 Patla AE, Vickers JN. How far ahead do we look when required to step on specific locations in the travel path during locomotion? *Experimental Brain Research* 2003; 148: 133–138.
- 48 Fotios S, Uttley J. Illuminance required to detect a pavement obstacle of critical size. *Lighting Research and Technology* 2018; 50: 390–404.
- 49 Stockmar A. *Extension of the luminance concept in road and tunnel lighting: Proceedings of 28th Session of the CIE*, Manchester, UK, June 28–July 4: 2015: 751–753.
- 50 Sørensen K, Ekrias A, Hafdel P, Corell D. *Reflection properties of road surfaces in Denmark*, Retrieved 18 March 2020 from <https://nmfv.dk/wp-content/uploads/2012/03/Reflection-properties-of-road-surfaces-in-Denmark-version-17-May-2017-1.pdf>.
- 51 Greffier F, Muzet V, Boucher V, et al. *Use of an imaging luminance measuring device to evaluate road lighting performance at different angles of observation: Proceedings of the 29th Quadrennial Session of the CIE*, Washington DC, USA, June 14–22 : 2019: 553–562.
- 52 Association Française de Normalisation. *Footways – Integration of disabled people – caution warning – Characteristics, testing and rules for ground installation of pedotactile caution warning devices for blind or partially sighted persons*. NF P98-351 August 2010. La Plaine Saint-Denis: AFNOR, 2010.
- 53 Waldram JM. The calculation of sky haze luminance from street lighting. *Lighting Research and Technology* 2016; 4: 21–26.
- 54 Crawford DL (ed.). *Light Pollution, Radio Interference, and Space Debris*. Orem, UT: Astronomical Society of the Pacific, 1991.

- 55 Garstang RH. Dust and light pollution. *Publications of the Astronomical Society of the Pacific* 1991; 103: 1109.
- 56 Soardo P, Iacomussi P, Rossi G, Fellin L. Compatibility of road lighting with star visibility. *Lighting Research and Technology* 2008; 40: 307–322.
- 57 Soardo P, Iacomussi P, Rossi G. *The luminance coefficient in road lighting. A parameter to save energy and reducing atmospheric pollution: Proceedings of 11th Lux Europa International Congress*, Istanbul: September 9–11: 2009.
- 58 Commission Internationale de l'Éclairage. *Guide on the limitation of the effects of obtrusive light from outdoor lighting installations*, 2nd Edition. CIE 150:2017. Vienna: CIE 2017.
- 59 Association Française de Normalisation. *External Light Pollution – Control and Calculation Methods*. XP X90 013:2011. La Plaine Saint-Denis: AFNOR, 2011.
- 60 Accueil | Sécurité Routière, Retrieved 23 June 2020, from <https://www.securite-routiere.gouv.fr/>.
- 61 Ministero delle Infrastrutture e dei Trasporti. *Norme funzionali e geometriche per la costruzione delle strade*. DM 6792\_05-11-2001. Roma: MIT, 2001.
- 62 Trafikverket. *Krav – VGU, Begrepp och grundvärden*. Publikation 2020:030. Borlänge: Trafikverket, 2020.
- 63 Schweizerischer Verband der Strassen- und Verkehrsfachleute. *Öffentliche Beleuchtung in Strassentunneln, Galerien und Unterführungen*. VSS 40 551-1:2019-03. Zürich: VSS, 2019.
- 64 Joint Committee for Guides in Metrology. *International Vocabulary of Metrology – Basic and General Concepts and Associated Terms. (VIM)*, 3rd Edition. JCGM 200:2012. Paris: JCGM, 2012.